


Butterfly Valve type L - M - S

Type L - slender sandwich design **Type M** - sandwich design **Type S** - large outer diameter

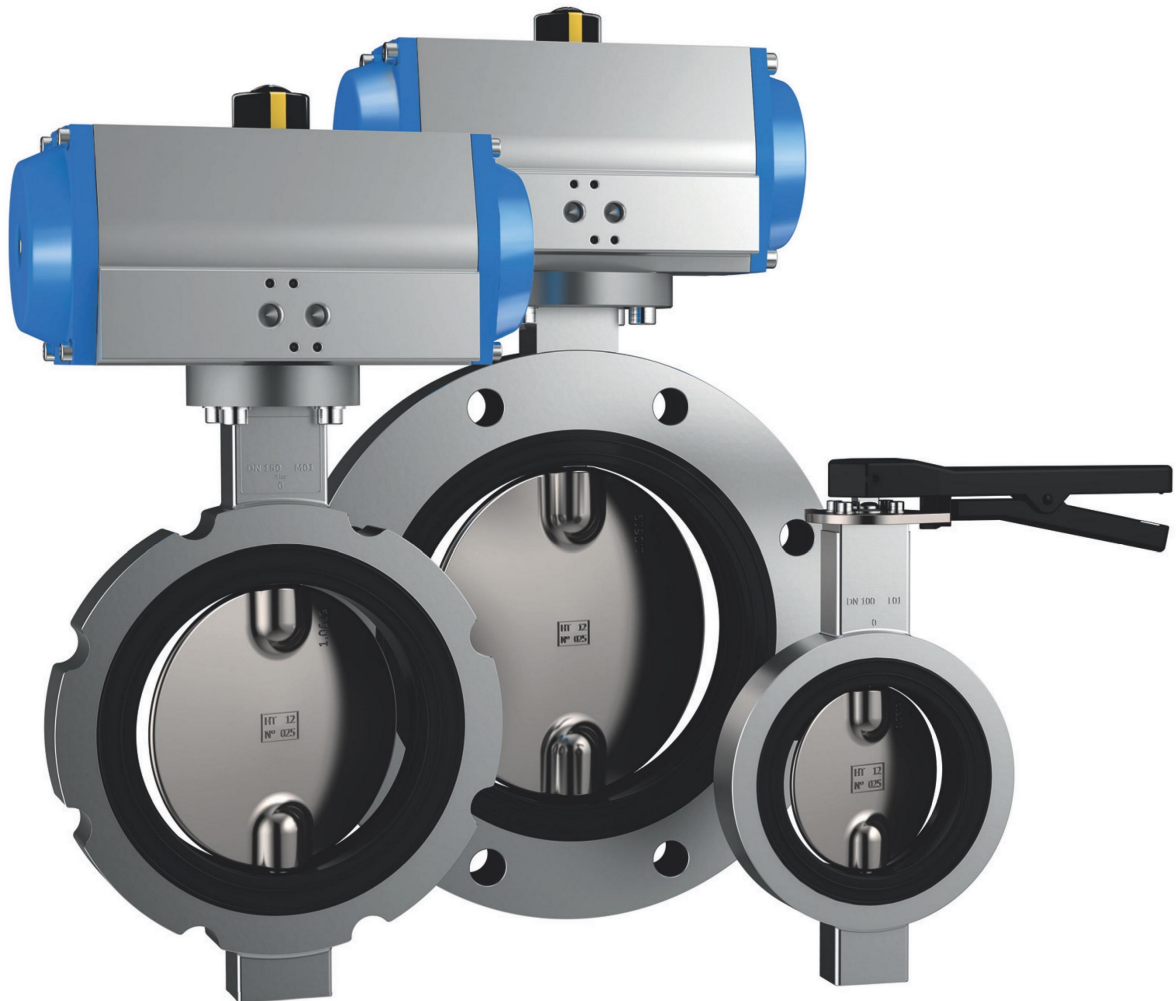

Plug-in connection shaft/valve disc up to DN 400 · hand-, pneumatic or electric actuation available · pressure sealed · certificate according to PED 97/23/EC and ATEX approval for Zone 0-2 / 20-22 optional · overall length according to DIN 3202 K1 - anular body: EN-AC 46200 · standard materials steel 1.0619 und stainless steel 1.4404 · materials sealing: NBR, EPDM, FPM, AU, MVQ, CSM